

CHEMICAL

MATERIAL

COATING

Unsupported

• Butyl



Unlined, unsupported butyl coating with rough grip finish

ſ **FEATURES**

- Unlined butyl rubber
- 0.35mm thick
- 350mm long
- Rolled cuff
- Rough grip

BENEFITS

- Protection against ketones, alcohols, nerve agents
- Provides the highest permeation resistance to gases and water
- vapors of any protective material used to make gloves
- Superior resistance to highly corrosive acids



Chemical



Municipal Services



- Chemical spraying & treatment
- Coating preparation
- Police & defense








EN ISO 374-5:2016



SHOWA

874R



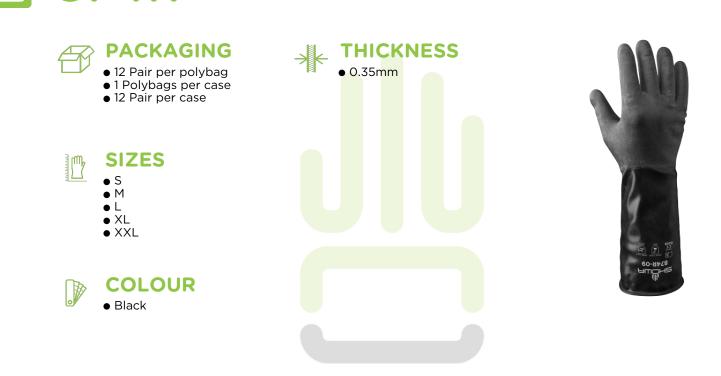

[YOU MIGHT ALSO BE INTERESTED IN



USER INSTRUCTIONS

Do not use where there are electrical, thermal or entanglement risks. Discard used gloves in compliance with local regulations. Permeation information does not reflect the actual duration of protection in the workplace due to other factors that may influence the performance. Store in a dry place, away from the light.

DISCLAIMER

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

Get in touch

SHOWA International | WTC - Tower I - Strawinskylaan 1817 - 1077 XX Amsterdam - The Netherlands showagroup.eu | info@showagroup.eu © SHOWA Group 2018 | All rights reserved